




| THE SPECIFICATION OF ANCHOR BOLT W/NUTS |                   |                 |                    |                        |              | PRIME SOURCE |
|---|-------------------|-----------------|--------------------|------------------------|--------------|--------------|
| SIZE                                    | SHANK DIA         | THREAD DIA      | THREAD LENGTH      | BEND LENGTH            | TOTAL LENGTH |              |
| 3/8"                                    | 0.326" ~ 0.330"   | 0.360" ~ 0.375" | 1.75" +0.24"<br>-0 | 1.25" +0.12<br>-0.062" | ±0.12"       |              |
| 1/2"                                    | 0.441" ~ 0.446"   | 0.485" ~ 0.498" | 1.75" +0.24"<br>-0 | 1.25" +0.12<br>-0.062" | ±0.12"       |              |
| 5/8"                                    | 0.557" ~ 0.562"   | 0.610" ~ 0.623" | 3.75" +0.24"<br>-0 | 1.5" +0.12<br>-0.062"  | ±0.12"       |              |
| 3/4"                                    | 0.6751" ~ 0.6800" | 0.733" ~ 0.748" | 3.75" +0.24"<br>-0 | 2" +0.12<br>-0.062"    | ±0.12"       |              |
| 7/8"                                    | 0.7933" ~ 0.7953" | 0.857" ~ 0.873" | 3.75" +0.24"<br>-0 | 2" +0.12<br>-0.062"    | ±0.12"       |              |
| 1"                                      | 0.910" ~ 0.913"   | 0.981" ~ 0.995" | 4" +0.24"<br>-0    | 2.5" +0.12<br>-0.062"  | ±0.12"       |              |

Diagram

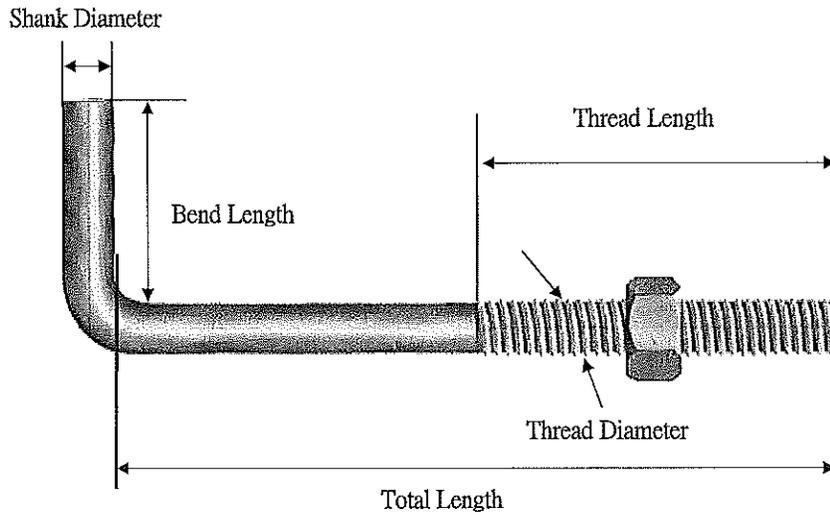

**MEETS ASTM A307 OR F1554, GRADE 36 SPECIFICATIONS**  
**HOT DIPPED GALVANIZED BOLTS MEET ASTM A153, CLASS C OR ASTM F2329 SPECIFICATIONS**